



## GSW-3208MP

8 Ports 10/100/1000Base-TX + 2 Ports  
GbE SFP Slot L2 Managed PoE Switch

The GSW-3208MP is a cost-effect high performance Gigabit L2 PoE switch - 8x10/100/1000Mbps TX ports and 2x SFP ports are supported. This switch supports remote management by SNMP, Http and Telnet interfaces, and local management by console interface. Console interface is supported for some basic settings. The GSW-3208MP supports lots of L2 switch functions, e.g. 802.1Q VLAN, 802.1x Port Security, Rate Control, Port Configuration, Port Mirroring, Port Statistics, QoS functions, ...etc. Auto-MDIX function is supported for every TX port of the switch for easy cable connection. The GSW-3208MP is compliant with IEEE802.3af and the pre-standard of 802.3at. The 8x10/100/1000Mbps TX ports are selectable to provide up to 15.4 or 30 watts power to connect PoE supported devices.

### Features

- 8x RJ45 ports, with 10/100/1000Mbps
- 2x Dual Speed SFP sockets, Port 9 and Port 10
- Port 1 ~ Port 8 support PSE function
- IPv6 management
- 8 priority queues are supported on each port for QoS application
- Private VLAN, 802.1Q VLAN, Voice VLAN and Q-in-Q(double tagging) function
- Protected port and LoopBack Detection function
- IEEE 802.1x security function, and VLAN assignment, Guest VLAN functions
- Static Mac address access limit and Dynamic Mac address number on port
- IEEE802.1d & 802.1w & 802.1s
- IP Multicast with IGMP snooping / query / fast leave / filtering / group limited /MVR
- DHCP Client / DHCP Option 82 Relay / DHCP Snooping function
- ACL function for L2 ~ L4 packet control
- Ingress/Egress rate control on port
- Broadcast/Multicast/Unicast storm control
- ARP inspection / IP source guard
- RMON 1,2,3,9
- SFP Transceiver DDMI function / Dual Speed SFP Ports(100/1000Mbps)
- Remote port configuration setting and statistics monitoring
- Text configuration download and upload
- IEEE 802.3az power management

### Specifications


System	
10/100/1000 BASE-T	8
100/1G SFP Slot	2 (Port 9, Port 10)
CPU	416MHz MIPS 24KEc CPU as the main processor which integrated on switch controller
Memory	Flash : SPI 16MB / RAM:DDRII 128MB
Packet buffer	4M bits
MAC Table size	8K
Switching capability	14880pps at 10Mbps, 148810pps at 100Mbps, 1488095pps at 1Gbps with 64 bytes packets.
Switch capacity	20Gbps
Forwarding Rate	14.8Mpps
PoE Standard	IEEE802.3af & IEEE802.3at
PoE Ports	8 Ports( Port 1 ~ Port 8 ) Per Port 56V DC, 350mA . Max. 15.4Watts Per Port 56V DC, 600mA . Max. 30Watts
PoE Power Budget	150Watts
Power PIN Assignment	1/2(-), 3/6(+)
Console port	D-Sub 9
19" Rack-mount	Yes, with kits
SFP DDMI	Yes
Dimension	330mm x 204mm x 44mm
Environmental Temperature	Operating: 0 ~ 50°C / Storage: -25 ~ 70°C
Humidity	10% ~ 90% (non-condensing)
LED Display	Per Port : Link/Act , PoE Act Per Device : Power, System
Power Input	AC Power input (100V~240V)

Software	
Port Control	Port speed, duplex mode, and flow control Port Auto MDI/MDI-X Port frame size (jumbo frames), Maximum ingress frame size (10056 bytes) Port state (administrative status) Port status (link monitoring) Port statistics (MIB counters)
L2 Switching	Auto MAC address learning/aging and MAC addresses (static) DHCP snooping ARP inspection Port Mirroring Flow mirroring
L3 Switching	DHCP option 82 relay IPv4 Unicast: Static routing
VLANs	IEEE 802.1Q static VLAN(4096 entries Max.), Voice VLAN, Port isolation, Private VLAN Static, MAC based VLAN, Protocol based VLAN, IP subnet based VLAN
Spanning Tree	IEEE 802.1s MSTP(Multiple spanning tree) IEEE 802.1w RSTP(Rapid spanning tree) IEEE 802.1D STP(Spanning tree) BPDU Guard & Restricted Role
Link Aggregation	Static and LACP
IP Multicast	IGMP v2 and v3 snooping MLD v1 snooping IGMP filtering profile IPMC throttling, filtering, leave proxy MVR and MVR profile

<b>QoS</b>	Traffic Classes (8 active priorities) Port Default Priority, User Priority, Input priority mapping QoS Control List (QCL Mode) Storm Control for UC, BC and Unknown Port policers Global/VCAP (ACL) policers Port egress shaper Queue egress shapers DiffServ (RFC2474) remarking Tag remarking Scheduler mode
<b>Security</b>	Port-Based 802.1X, Single 802.1X, Multiple 802.1X, MAC-Based Authentication VLAN Assignment , QoS Assignment, Guest VLAN RADIUS Accounting MAC Address Limit IP MAC binding, IP/MAC binding dynamic to static TACACS+ Web & CLI Authentication Authorization (15 user levels) ACLs for filtering/policing/port copy IP source guard

<b>Synchronization</b>	NTPv4 Client
<b>SFP DDMI</b>	Yes
<b>Management</b>	DHCP Client, DNS client, proxy HTTP Server CLI - Console Port & Telnet Text Configuration download or upload Management access filtering HTTPS SSHv2 IPv6 Management System Syslog Software Upload via web SNMP v1 / v2c / v3 Agent RMON (Group 1, 2, 3 & 9) RMON alarm and event(CLI,web) SNMP multiple trap destinations IEEE 802.1AB-2005 Link Layer Discovery LLDP Cisco Discovery filtering - CDP sFlow Daylight Saving

## Application

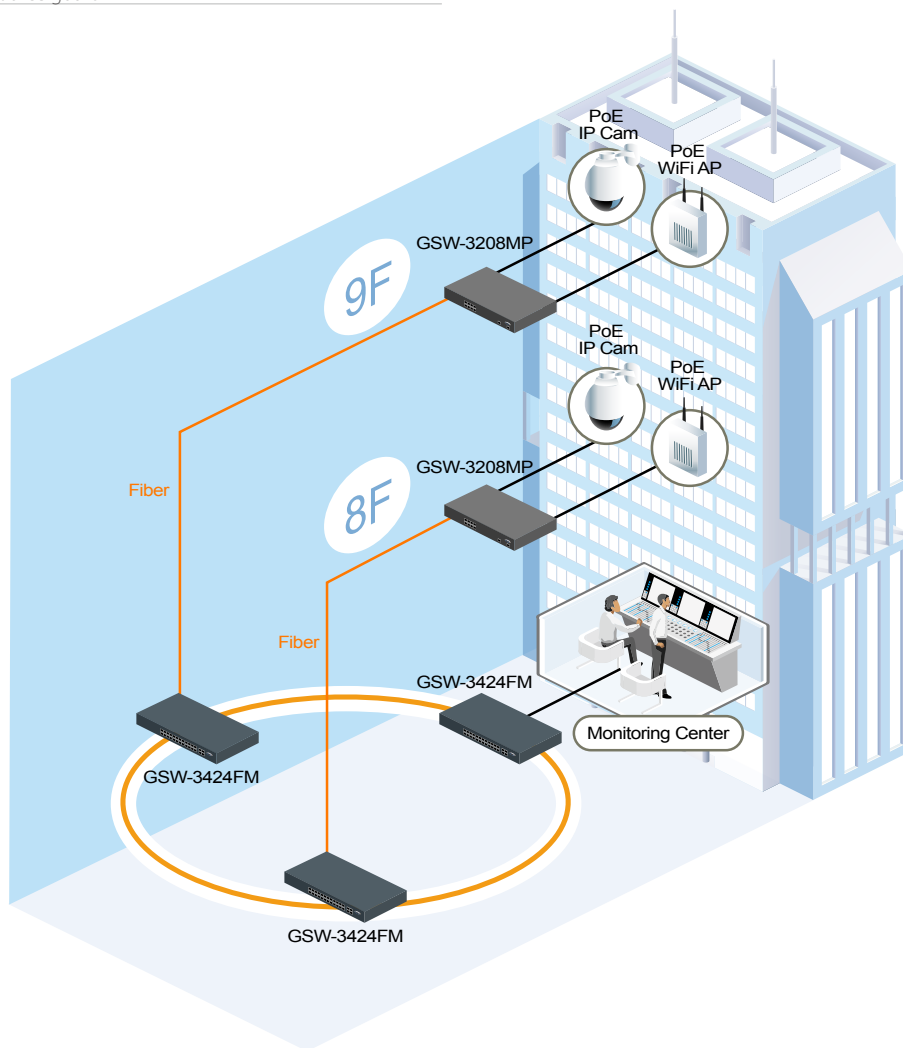

## Ordering Information

Model Name	Description
<b>GSW-3208MP</b>	8 ports 10/100/1000Base-TX + 2 ports GbE SFP slot L2 Managed PoE Switch

[www.ipc2u.de](http://www.ipc2u.de) [www.ipc2u.com](http://www.ipc2u.com) Date. 03/2015 Rev.01