


# Industrial 1(2)-Port 10GBASE-X SFP+ + (1)-Port 10GBASE-T Managed Media Converter



## Environmentally-robust, ultra-fast Connections and Secure Management

PLANET's Industrial IXT-900 high-performance media converter series is environmentally-robust now that it comes with an extended operating temperature ranging from **-40 to 75 degrees Celsius** designed for challenging environments. This series features **standalone secure management**, setting a **new standard for enterprise and telecom remote management and monitoring**. The IXT-900 Industrial Series allows for seamless remote management through an intuitive web interface, command line interface (CLI), and SNMP protocol, facilitating effortless monitoring and configuration from any location.

Our cutting-edge industrial media converters retain the original's powerful features, boasting 10GBASE-T copper port and 10G SFP+ port. This industrial series comes with the 10G unparalleled transmission speed given its fiber and copper ports. Compact yet powerful, the IXT-900 Series stands as the optimal choice for businesses seeking to enhance network speed and functionality, now designed to thrive in a wide temperature range for increased adaptability.

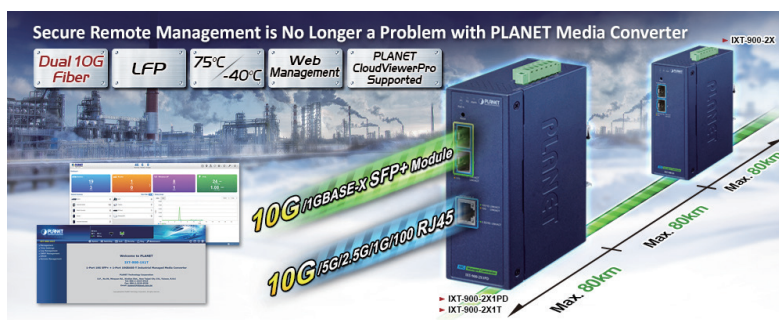

## 10GBASE-T and 10GBASE-X SFP Dual Media Interfaces for Diversified Bandwidth Applications

The IXT-900 series can reach speeds of up to 10Gbps over copper or fiber-optic cabling, greatly improving the performance of large data transmissions. Its built-in 10GBASE-T copper interfaces feature 5-speed auto-negotiation (10G/5G/2.5G/1G/100)

## Physical Port

- 10G/5G/2.5G/1G/100BASE-T RJ45 interface with auto MDI/MDI-X function
- 10G/2.5G/1G/100BASE-X SFP+ interface
- Note: Please refer to the specifications table to obtain information on the number of ports available on each model.

## Layer 2 Features

- Storm Control support
  - Broadcast / Multicast / Unknown Unicast
- Supports VLAN
  - IEEE 802.1Q tagged VLAN
  - Supports provider bridging (VLAN Q-in-Q, IEEE 802.1ad)
  - Up to 256 VLAN groups, out of 4096 VLAN IDs
- Supports ITU-T G.8032 ERPS ring with recovery time less than 500ms (software-based)
- Link Layer Discovery Protocol (LLDP)
- 16K MAC address table with auto-aging
- Jumbo Frame support up to 9K in size

## Quality of Service

- Ingress Shaper and Egress Rate Limit per port bandwidth control
- 8 priority queues on all converter ports
- Strict priority and Weighted Round Robin (WRR) CoS policies
- Traffic classification
  - IEEE 802.1p CoS
  - IP TOS / DSCP / IP Precedence
  - IP TCP/UDP port number
  - Typical network application

## Management

- IPv4 and IPv6 dual stack management
- Supports Link Fault Pass-through
- Management Interfaces
  - Web HTTP/HTTPS management
  - Telnet Command Line Interface
  - SNMP v1, v2c, v3 monitoring
  - SSHv2, TLSv1.2
- System Maintenance
  - Firmware upload/download via HTTP
  - Reset button for system reboot or reset to factory default
  - Dual images
- Simple Network Time Protocol (SNTP)
- User privilege levels control

and can transmit data over the existing Cat6/Cat6A UTP cabling, eliminating the need for expensive upgrades. With its Plug and Play design, installation is easy and hassle-free, so you can enjoy the speed you need without any extra effort.



- SNMP Management
  - SNMP trap for interface link up and link down notification
  - Four RMON groups (history, statistics, alarms and events)
- Network Diagnostic
  - SFP-DDM (Digital Diagnostic Monitor)
- Syslog remote alarm
- Local system Log
- ICMPv6 / ICMPv4 remote ping
- PLANET Smart Discovery Utility for deployment management
- PLANET Remote Management
  - PLANET NMS Controller and CloudViewerPro app for deployment management

### Security


- IP address access management to prevent unauthorized intruder
- Static MAC setting and MAC Filtering
- Protected ports (IXT-900-2X1T and IXT-900-2X1PD only)

### Case and Installation

- Dual 9~48VDC external power supply, 24VAC or PoE input (only for IXT-900-2X1PD)
- -40 to 75 degrees C operating temperature
- Supports 4KVDC Contact / 8KVDC Air Ethernet ESD protection
- Wall-mount and DIN-rail installation (optional)

### Two Fiber Optic Ports Double the Distance of Deployment

Conventional media converters typically support only a single pair of different media conversions, such as converting one fiber to one copper connection. They can extend a 100m copper connection to a maximum of 80km fiber optic connection. In contrast, the IXT-900-2X/IXT-900-2X1T/IXT-900-2X1PD has two fiber optic ports and one copper port, enabling the two fiber optic cables to connect to devices up to 160km apart so as to significantly extend the deployment distance.

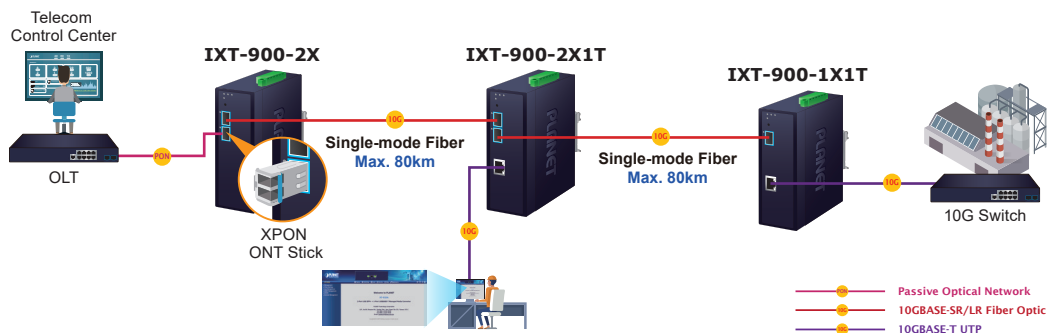


### Link Fault Pass-through

Link Fault Pass-through is a networking feature. It facilitates the detection and propagation of link faults or errors from one network device to another. It helps maintain network reliability and minimizes downtime by allowing devices to dynamically respond to link faults. Link Fault Pass-through improves fault detection and enables faster troubleshooting and resolution processes.

How it works:


- When a link fault occurs, the device experiencing the fault generates a notification.
- This notification is then forwarded to other connected devices using Link Fault Pass-through.
- Upon receiving the link fault information, the connected devices become aware of the fault.
- This awareness enables them to take appropriate actions, such as rerouting traffic or disabling the affected port.

**Remote Link Normal (Copper to Fiber Pair)**

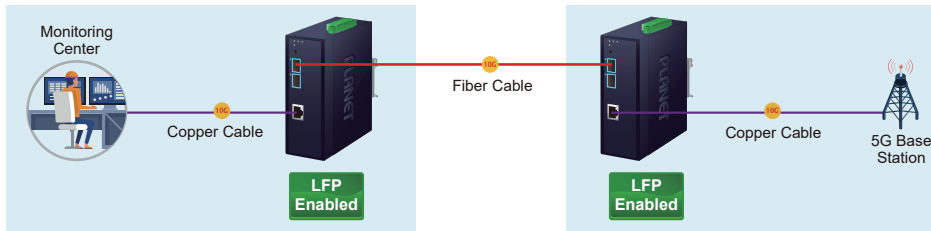


**Remote Link Broken**

Copper and Fiber are configured based on LFP group

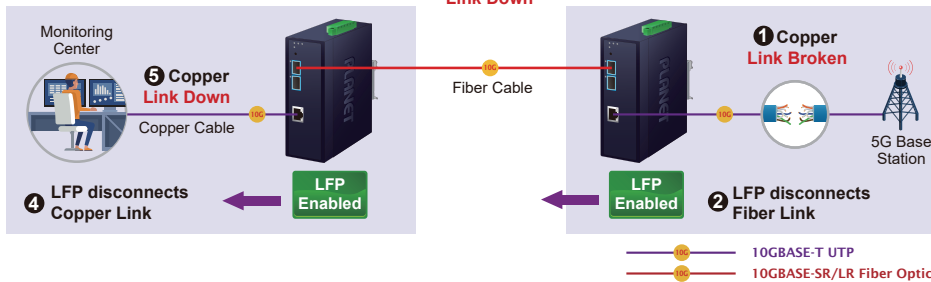


**Remote Link Normal (Fiber to Fiber Pair)**

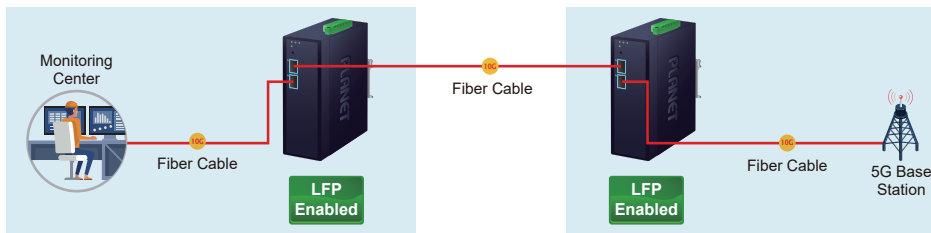

**Remote Link Broken**

Copper and Fiber are configured based on LFP group

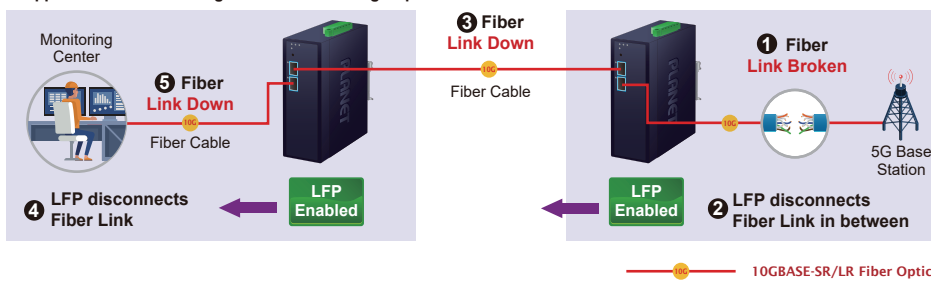


*Network with Cybersecurity Helps Minimize Risks*

The IXT-900 series is equipped with enhanced cybersecurity features to fend off cyber threats and attacks. It supports SSHv2, TLSv1.2, and SNMPv3 protocols to provide strong protection against advanced threats. Thus, transmitting data to a customer's critical equipment in a business network is very secure. The IXT-900 series protects network management and enhances the security of mission-critical networks without incurring any additional deployment cost or effort.




**Redundant Ring, Fast Recovery for Critical Network Applications**

The IXT-900 series supports software-based redundant ring technology and features strong, rapid self-recovery capability to prevent interruption and external intrusions. It incorporates advanced ITU-T G.8032 ERPS (Ethernet Ring Protection Switching) technology, ensuring rapid self-recovery in ring networks. With this advanced feature, the data link recovery time can be as fast as 500ms.

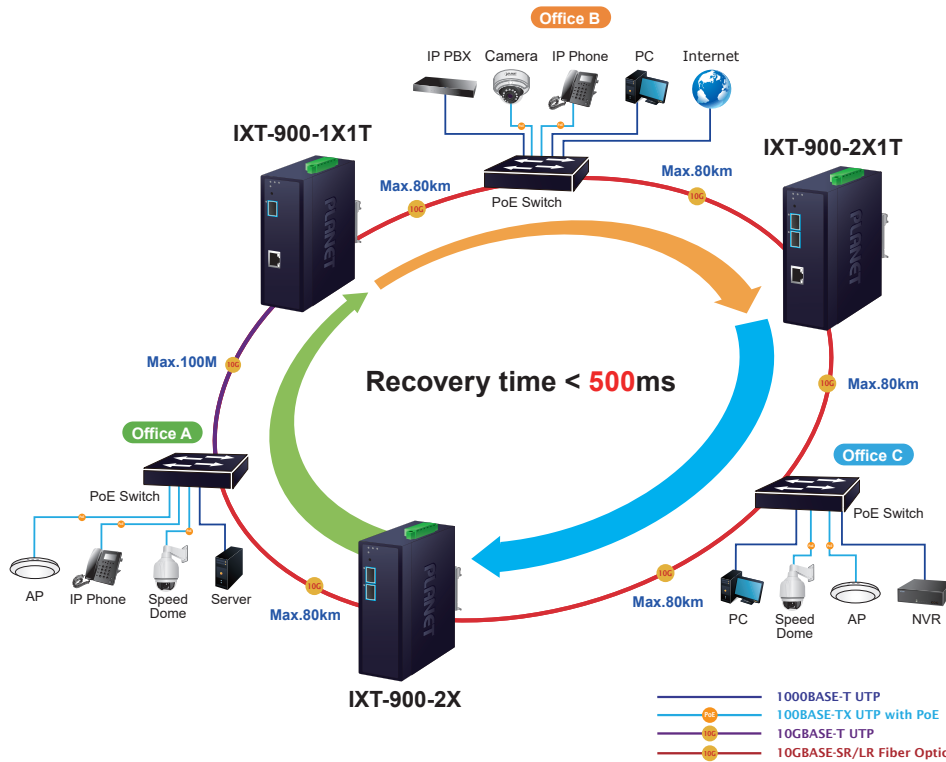

**IPv6/IPv4 Dual Stack Management**

Supporting both IPv6 and IPv4 protocols, the IXT-900 series helps the SMBs to step in the IPv6 era with the lowest investment as their network facilities need not be replaced or overhauled if the IPv6 FTTx edge network is set up.

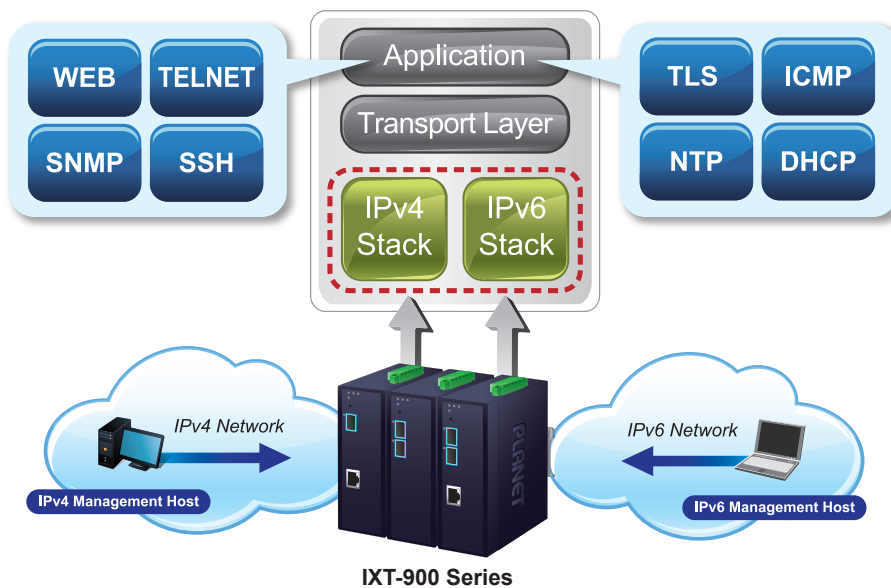

**SNMP for Comprehensive Network Monitoring and Centralized Control**

SNMP (Simple Network Management Protocol) provides network monitoring and management capabilities by gathering real-time information about network devices. By proactively identifying and addressing network issues, reliability and performance are improved. SNMP also facilitates centralized control of network devices, allowing for monitoring and configuration of multiple devices from a single location, reducing manual effort and enhancing operational efficiency.

### Layer 2 Features


The device has a 16K-entry MAC address table that automatically removes inactive addresses. Its backbone supports speeds of up to 40Gbps, and it can handle Jumbo Frames up to 9K in size. The device is equipped with Storm Control to manage Broadcast/Multicast/Unknown-Unicast traffic, and features an IPv6 MAC/VLAN/Multicast Address Table and Loop Protection.

### Efficient Traffic Control

The IXT-900 media converter series boasts advanced QoS features and robust traffic management capabilities, optimizing the delivery of business-class data, voice, and video solutions. Its features include broadcast/multicast/unicast storm control, per-port bandwidth control, and 802.1p CoS/DSCP/IP Precedence QoS priority and remarking. These capabilities guarantee optimal performance for VoIP and video stream transmission, maximizing the utilization of limited network resources for enterprises

### Intelligent SFP Diagnosis Mechanism

The IXT-900 series supports the SFP-DDM (digital diagnostic monitor) function, which greatly helps network administrators easily monitor real-time parameters of the SFP transceivers. These parameters include optical output power, optical input power, temperature, laser bias current, and transceiver supply voltage.

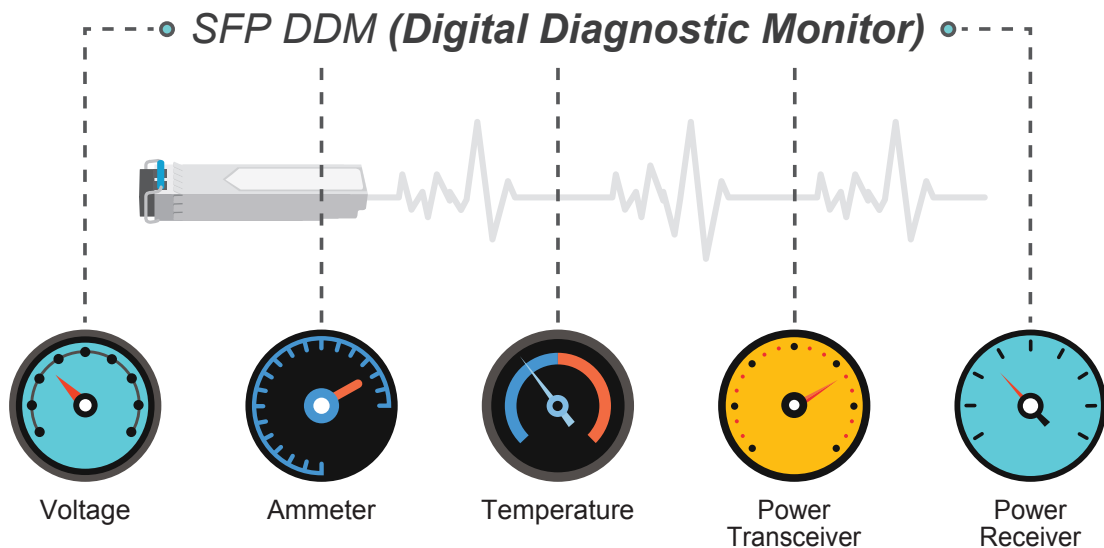

### Remote Management Solution


PLANET's Universal Network Management System (UNI-NMS) and CloudViewer Pro app provide robust support for IT staff in effectively managing and monitoring all network devices, including the IXT-900 series, from remote locations. Tailored for deployment in both enterprises and industries where the IXT-900 series is utilized remotely, these systems enable the identification of bugs or faulty conditions without the need for on-site visits. Whether using UNI-NMS or the CloudViewerPro app, businesses of all types can now be swiftly and efficiently managed through a unified platform, streamlining operational oversight.



## Applications

### Fiber-optic Networking for ISPs, Enterprises and Homes

With high-speed data transmission and easy installation, the IXT-900 series can build FTTH (Fiber to the Home) and FTTC (Fiber to the Curb) for ISPs, and FTTB (Fiber to the Building) for enterprises. The IXT-900 series enables network administrators to easily monitor operations via the Web management interface.

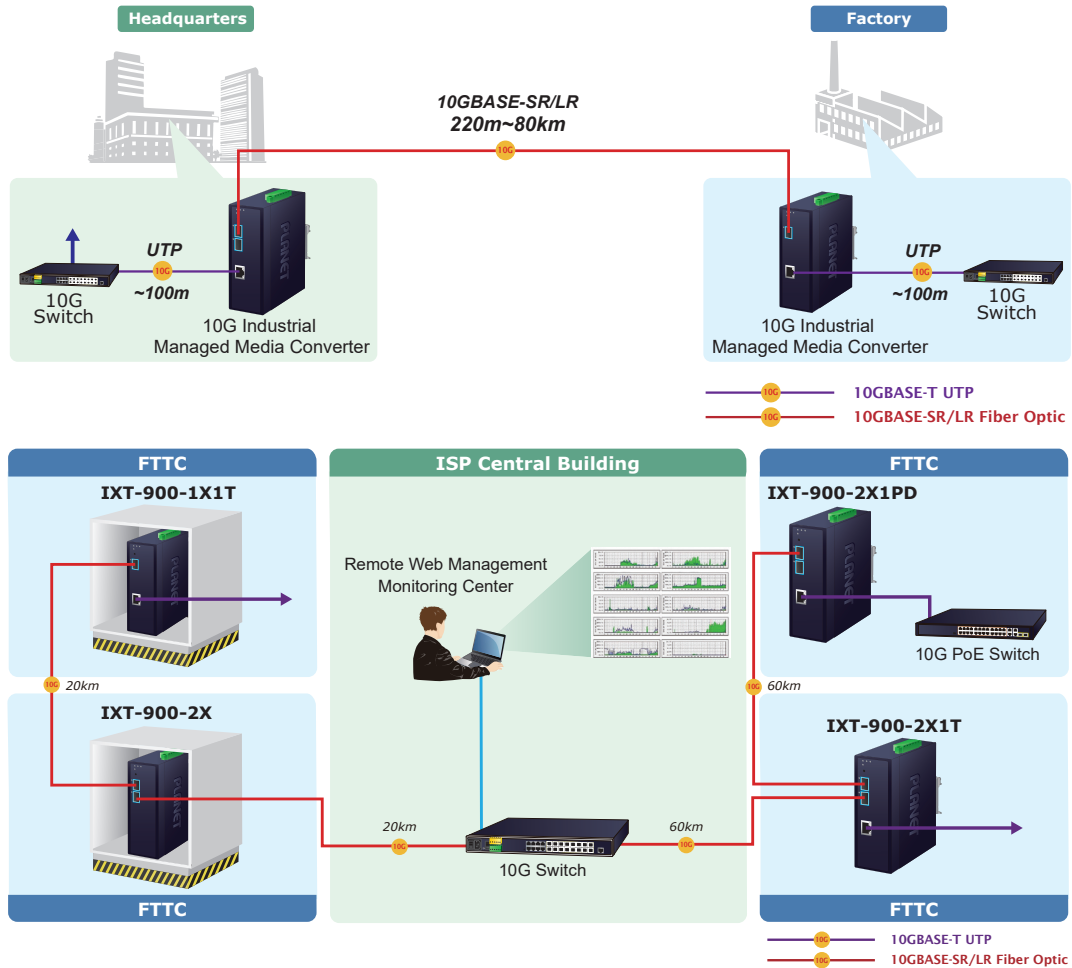

## Specifications

| Model                          | IXT-900-1X1T  | IXT-900-2X                              | IXT-900-2X1T  | IXT-900-2X1PD |
|--------------------------------|---|---|---|---------------|
| <b>Hardware Specifications</b> |   |   |   |               |
| Copper Interface               | 1x 10G/5G/2.5G/1G/100BASE-T RJ45 interface with auto MDI/MDI-X function | -                                       | 1x 10G/5G/2.5G/1G/100BASE-T RJ45 interface with auto MDI/MDI-X function | -             |
| PoE PD                         | -   | -                                       | -   | 1             |
| Fiber Interface                | 1x 10G/2.5G/1G/100BASE-X SFP+ interface                                 | 2x 10G/2.5G/1G/100BASE-X SFP+ interface | -   | -             |
| Reset Button                   | < 5 sec.: System reboot<br>> 5 sec.: Factory default                    |   |   |               |
| ESD Protection                 | 4KVDC Contact / 8KVDC Air   |   |   |               |
| Enclosure                      | Compact-sized metal case  |   |   |               |
| Installation                   | Wall-mount kit and DIN-rail kit installation (optional)                 |   |   |               |
| Dimensions (W x D x H)         | 135 x 86 x 49mm   |   |   |               |
| Weight                         | 578g  | 576g                                    | 607g  | 604g          |
| Power Requirement              | Dual 9~48V DC, 24V AC or PoE input (Only for IXT-900-2X1PD)             |   |   |               |

|                                    |  |              |               |              |
|------------------------------------|--|--------------|---------------|--------------|
| Power Consumption (No loading)     | 3.7W/12.6BTU   | 3.2W/10.9BTU | 3.7W/12.6BTU  | 3.9W/13.3BTU |
| Power Consumption (Full loading)   | 10.7W/36.5BTU  | 5.6W/19.1BTU | 10.3W/35.1BTU | 9.5W/32.4BTU |
| LED Indicator                      | <b>System:</b>   |              |               |              |
|                                    | PWR, (Green)   |              |               |              |
|                                    | <b>Per 10GBASE-T RJ45 Port:</b>  |              |               |              |
|                                    | 100/1G LINK/ACT (Green)  |              |               |              |
|                                    | 2.5G/5G LINK/ACT (Green)   |              |               |              |
|                                    | 10G LINK/ACT (Amber)   |              |               |              |
| LED Indicator                      | <b>Per 10GBASE-X SFP+ Port:</b>  |              |               |              |
|                                    | 100/1G LINK/ACT (Green)  |              |               |              |
|                                    | 2.5G LINK/ACT (Green)  |              |               |              |
| 10G LINK/ACT (Amber)               |  |              |               |              |
| <b>Transmission Specifications</b> |  |              |               |              |
| Processing Scheme                  | Store and Forward  |              |               |              |
| Switching Fabric                   | 40Gbps   | 40Gbps       | 60Gbps        | 60Gbps       |
| Throughput (packet per second)     | 29.76Mpps@64bytes  |              |               |              |
| Address Table                      | 16K entries, automatic source address learning and aging   |              |               |              |
| Flow Control                       | Back pressure for half duplex<br>IEEE 802.3x pause frame for full duplex   |              |               |              |
| Jumbo Frame                        | 9K   |              |               |              |
| Shared Buffer                      | 12Mbits  |              |               |              |
| <b>Layer 2 Function</b>            |  |              |               |              |
| Port Configuration                 | Port disable/enable  |              |               |              |
|                                    | Auto-negotiation 100Mbps, 1/2.5/5/10Gbps full and half duplex mode selection<br>Flow control disable/enable              |              |               |              |
| Port Status                        | Display each port's link status, speed, Auto-negotiation status, duplex mode and flow control status                     |              |               |              |
| VLAN                               | IEEE 802.1Q tag-based VLAN   |              |               |              |
|                                    | IEEE 802.1ad Q-in-Q tunneling<br>Up to 256 VLAN groups, out of 4096 VLAN IDs   |              |               |              |
| Bandwidth Control                  | Per port bandwidth control   |              |               |              |
|                                    | Ingress: 16~10,000,000Kbps<br>Egress: 16~10,000,000Kbps  |              |               |              |
| QoS                                | Traffic classification based, strict priority and WRR  |              |               |              |
|                                    | 8-level priority for switching   |              |               |              |
|                                    | Traffic classification:<br>- Cos/802.1p<br>- DSCP<br>- IP Precedence   |              |               |              |
| Ring                               | Supports ERPS, and complies with ITU-T G.8032  |              |               |              |
|                                    | Recovery time < 500ms  |              |               |              |
| <b>Security Function</b>           |  |              |               |              |
| Access Security                    | Remote management protocols support SSH, Telnet, HTTP and HTTPs<br>Protected ports (IXT-900-2X1T and IXT-900-2X1PD only) |              |               |              |
| <b>System Management</b>           |  |              |               |              |
| Basic Management Interfaces        | Telnet, Web browser, SNMP v1, v2c  |              |               |              |
| Secure Management Interfaces       | SSHv2, TLS v1.2, SNMP v3   |              |               |              |
| System Management                  | Firmware upgrade by HTTP protocol through Ethernet network   |              |               |              |
|                                    | Configuration upload/download through HTTP   |              |               |              |
|                                    | LLDP protocol  |              |               |              |
|                                    | SNTP   |              |               |              |
|                                    | PLANET Smart Discovery Utility<br>PLANET NMS Controller<br>PLANET CloudViewerPro mobile app                              |              |               |              |
| Event Management                   | Remote syslog  |              |               |              |
|                                    | Local system log   |              |               |              |
|                                    | SNMP trap  |              |               |              |

|                              |   |
|------------------------------|---|
| SNMP MIBs                    | RFC 1213 MIB-II                             |
|                              | RFC 2863 IF-MIB                             |
|                              | RFC 1493 Bridge MIB                         |
|                              | RFC 1643 Ethernet MIB                       |
|                              | RFC 2863 Interface MIB                      |
|                              | RFC 2665 Ether-Like MIB                     |
|                              | RFC 2737 Entity MIB                         |
|                              | RFC 2819 RMON MIB (Groups 1, 2, 3 and 9)    |
|                              | RFC 3411 SNMP-Frameworks-MIB                |
|                              | LLDP  |
| MAU-MIB                      |   |
| <b>Standards Conformance</b> |   |
| Regulatory Compliance        | FCC Part 15 Class A, CE                     |
| Stability Testing            | IEC60068-2-32 (free fall)                   |
|                              | IEC60068-2-27 (shock)                       |
|                              | IEC60068-2-6 (vibration)                    |
| Standards Compliance         | IEEE 802.3u, 100BASE-TX/FX                  |
|                              | IEEE 802.3ab, 1000BASE-T                    |
|                              | IEEE 802.3bz, 2.5G/5GBASE-T                 |
|                              | IEEE 802.3an, 10GBASE-T                     |
|                              | IEEE 802.3z, 1000BASE-SX/LX                 |
|                              | IEEE 802.3ae 10GBASE-SR/LR                  |
|                              | IEEE 802.3x full-duplex flow control        |
|                              | IEEE 802.1p Class of Service                |
|                              | IEEE 802.1Q VLAN tagging                    |
|                              | IEEE 802.1ad Q-in-Q VLAN stacking           |
|                              | IEEE 802.1ab LLDP                           |
|                              | RFC 768 UDP                                 |
|                              | RFC 2474 DSCP                               |
|                              | RFC 791 IP                                  |
|                              | RFC 792 ICMP                                |
| RFC 2068 HTTP                |   |
| ITU-T G.8032 ERPS Ring       |   |
| <b>Environment</b>           |   |
| Operating                    | Temperature: -40 ~ 75 degrees C             |
|                              | Relative Humidity: 5 ~ 95% (non-condensing) |
| Storage                      | Temperature: -40 ~ 85 degrees C             |
|                              | Relative Humidity: 5 ~ 95% (non-condensing) |





## Available 10Gbps Modules for IXT-900 Series

|           |   |
|-----------|---|
| MTB-TSR2  | 1-Port 10GBASE-LR SFP+ Fiber Optic Module – 2km (-40~85 degrees C)                        |
| MTB-TLR20 | 1-Port 10GBASE-LR SFP+ Fiber Optic Module - 20km (-40~85 degrees C)                       |
| MTB-TLR60 | 1-Port 10GBASE-LR SFP+ Fiber Optic Module - 60km (-40~85 degrees C)                       |
| MTB-TLA20 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1270nm RX:1330nm) (-40~85 degrees C) |
| MTB-TLB20 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1330nm RX:1270nm) (-40~85 degrees C) |
| MTB-TLA40 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1270nm RX:1330nm) (-40~85 degrees C) |
| MTB-TLB40 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1330nm RX:1270nm) (-40~85 degrees C) |
| MTB-TLA60 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1270nm RX:1330nm) (-40~85 degrees C) |
| MTB-TLB60 | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1330nm RX:1270nm) (-40~85 degrees C) |
| MTB-LA10  | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 10km (TX:1270nm RX:1330nm)                    |
| MTB-LB10  | 1-Port 10GBASE-BX SFP+ Fiber Optic Module - 10km (TX:1330nm RX:1270nm)                    |

## Available 2.5Gbps Modules for IXT-900 Series

|             |   |
|-------------|---|
| MGB-2GTSR   | 1-Port 2.5G SFP Transceiver (Multi-mode, 850nm, DDM, -40~85 degrees C)                    |
| MGB-2GTLA20 | 1-Port 2.5G SFP Transceiver (Single mode WDM, TX:1310nm RX:1550nm, DDM, -40~85 degrees C) |
| MGB-2GTLB20 | 1-Port 2.5G SFP Transceiver (Single mode WDM, TX:1550nm RX:1310nm, DDM, -40~85 degrees C) |
| MGB-2GTLR20 | 1-Port 2.5G SFP Transceiver (Single mode, 1310nm, DDM, -40~85 degrees C)                  |
| MGB-2GTLR2  | 1-Port 2.5G SFP Transceiver (Single mode, 1310nm, DDM, -40~85 degrees C)                  |

## Available 1Gbps Modules for IXT-900 Series

|            |  |
|------------|--|
| MGB-TSX    | 1-Port SFP-Port 1000BASE-SX mini-GBIC module - 550m (-40~85 degrees C)                   |
| MGB-TSX2   | 1-Port SFP-Port 1000BASE-SX mini-GBIC module – 2km (-40~85 degrees C)                    |
| MGB-TLX    | 1-Port SFP-Port 1000BASE-LX mini-GBIC module - 20km (-40~85 degrees C)                   |
| MGB-TL40   | 1-Port SFP-Port 1000BASE-LX mini-GBIC module - 40km (-40~85 degrees C)                   |
| MGB-TL80   | 1-Port SFP-Port 1000BASE-LX mini-GBIC module - 80km (-40~85 degrees C)                   |
| MGB-TLA10  | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 10km (-40~85 degrees C)  |
| MGB-TLB10  | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 10km (-40~85 degrees C)  |
| MGB-TLA20  | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 20km (-40~85 degrees C)  |
| MGB-TLB20  | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 20km (-40~85 degrees C)  |
| MGB-TLA40  | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 40km (-40~85 degrees C)  |
| MGB-TLB40  | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 40km (-40~85 degrees C)  |
| MGB-TLA80  | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1490nm) mini-GBIC module - 80km (-40~85 degrees C)  |
| MGB-TLB80  | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 80km (-40~85 degrees C)  |
| MGB-TSA    | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 2km (-40~85 degrees C)   |
| MGB-TSB    | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 2km (-40~85 degrees C)   |
| MGB-TGT    | 1-Port SFP-Port 1000BASE-T Module – 100m (-40~85 degrees C)                              |
| MGB-TLA120 | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1490nm) mini-GBIC module - 120km (-40~85 degrees C) |
| MGB-TLB120 | 1-Port SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 120km (-40~85 degrees C) |