# **VBOX-3620-M12X**

Taiwan Patent No. M447854, M448011

Intel Gen6 Core i7-6600U CPU with Isolated Input 3 x GbE and 1 x iAMT In-Vehicle Computer/ EN50155 Railway Applications

#### **Features**

- Intel Core i7-6600U / i5-6300U / i3-6100U
- Wireless support LTE w/ SIM Card, WLAN, GPS Dead Reckoning, BT(Option)
- 3 x GbE including 1 with iAMT
- Isolated wide Input Range 9-36V DC
- Max. 8 x SIM card Sockets
- Dual Hot Swappable SATA Storage, RAID 0,1,5
- EN50155 Tx temperature and class S2 interruption
- E-13 and ECE-R118 Certified











GPS

Wide Range

Delay Tim

#### Introduction

The VBOX-3620-M12X is powered by Intel Gen6 Core i7-6600U CPU with Isolated input In-Vehicle Computer. VBOX-3620-M12X provides three GbE, including one with iAMT. It offers wireless support LTE with SIM Card, GPS, and BT (optional). It features smart vehicle power ignition for a variety of vehicles, and it can be adapted to all kinds of vehicle management systems like those with GPS, fleet monitoring systems, and vehicle repairing systems. It can manage a vehicle's internal capabilities to accurately assess and track a vehicle's internal hardware and software states, forward-thinking usage, and all fleet movements.


## **Specifications**


System		
CPU	Intel Gen6 Core i7-6600U 2.6GHz up to 3.4GHz	
	Intel Gen6 Core i5-6300U 2.4GHz up to 3GHz	
	Intel Gen6 Core i3-6100U 2.3GHz	
	Intel Gen6 Dual Core 3955U 2.0GHz	
Memory	2 x SO-DIMM DDR4 up to 32GB	
LAN Chipset	2 x Intel I210AT and 1 x Intel i219LM	
Audio	Realtek ALC662 HD Codec Onboard	
Watchdog	Watchdog Timer Support, Offer 1 – 255 Step	
I/O		
Serial Port	4 x RS-232/422/485, w/ isolation (Auto Direction Control)	
USB Port	2 x USB 3.0 Ports, 2 x USB 2.0 Ports	
LAN	3 x 10/100/1000 Mb/s w/ M12 x-code (1 port with iAMT)	
Video Port	2 x DP Port, 1 x VGA (Support Triple Independent Display)	
DIO Port	8 x GPI and 4 x GPO w/ isolation	
Audio	1 x Line-out and 1 x Mic-in (Line-in Optional)	
SIM Card Socket	2 x SIM Card Sockets, supported onboard with eject	
Silvi Card Socket	6 x SIM Card Sockets (Optional order No. SIM-6A)	
Expansion Bus	3 x Mini-card slots and 1 x M.2 A-E Key 2230 slot	
Graphics		
	Intel® HD Graphics 520	
Graphics	DirectX Video Acceleration (DXVA) for Accelerating Video Processing - Full AVC/VC1/MPEG2 HW Decode Supports DirectX 11/10.1/10/9 and OpenGL 4.0	
Resolution	Up to 4096 x 2304@60 Hz	
Software		
Operating System	Win 10, Ubuntu 16.04 64bit	

Fundamental		
Environment		
Operating Temp.	-40°C ~ 70°C, ambient w/ 0.6m/s airflow  Patent No.: M565941 - Thermal Cooling	
Storage Temp.	-40°C ~ 80°C	
Relative Humidity	10% RH – 90% RH (non-condensing)	
Vibration	IEC60068-2-64, random, 2.5G@5~500Hz, 1hr/axis	
(with SSD)	EN 50155 EN61373, Operating	
Shock	EN 50155 EN61373	
Certifications	CE, FCC Class A, EN50155, EN50121, E13, EN45545-2 (R25), ECR-R118	
Storage		
T	2 x 2.5" Drive Bay for SATA Type HDD/SSD RAID 0, 1, 5	
Туре	1 x SATA DOM or mSATA (Auto detected)	
Power Requirement		
Power Input	9V - 36V DC Power Input with Isolation	
Power Protection	Automatics Recovery Short Circuit Protection	
Power Mgmt.	Vehicle Power Ignition for Variety Vehicle	
	verticle i ower ignition for variety verticle	
Power Off Control	Power off Delay Time Setting by Software and BIOS	
Power Off Control  Battery (UPS)*	ÿ	
	Power off Delay Time Setting by Software and BIOS Internal Battery Kit for 10 Mins Operating (Optional) *UPS backup time varies depending on actual overall system power consumption.	
	Power off Delay Time Setting by Software and BIOS Internal Battery Kit for 10 Mins Operating (Optional) *UPS backup time varies depending on actual overall system power consumption. Patent No.: M447854 - Build-in Battery	
Battery (UPS)*	Power off Delay Time Setting by Software and BIOS Internal Battery Kit for 10 Mins Operating (Optional) *UPS backup time varies depending on actual overall system power consumption. Patent No.: M447854 - Build-in Battery	
Battery (UPS)*  Mechanical	Power off Delay Time Setting by Software and BIOS Internal Battery Kit for 10 Mins Operating (Optional) *UPS backup time varies depending on actual overall system power consumption. Patent No.: M447854 - Build-in Battery  *with 6 x SIM card slots option cannot have Battery option	
Battery (UPS)*  Mechanical Construction	Power off Delay Time Setting by Software and BIOS Internal Battery Kit for 10 Mins Operating (Optional) *UPS backup time varies depending on actual overall system power consumption. Patent No.: M447854 - Build-in Battery  *with 6 x SIM card slots option cannot have Battery option  Aluminum Alloy	

### **Dimensions**

Unit: mm



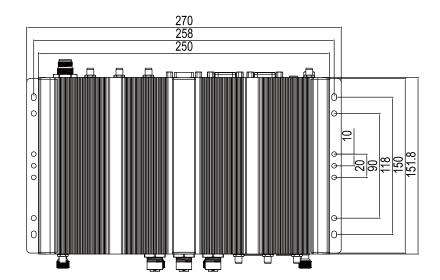



Please Scan The QR Code For More Information

# **Ordering Information**

Part Number	VBOX-3620-M12X-i7, option for i5/i3/C1	
Description	Intel Gen6 Core i7-6600U CPU with Isolated Input 3x GbE with 1 x iAMT In-Vehicle Computer/EN50155 Railway Applications	
State of Origin	Made in Taiwan	

# **Optional Accessories**

•	
DRAM	SO-DIMM max.DDR4-2133,4GB~32GB,0~70°C/-40~85°C
SATA SSD	2.5inch MLC/TLC 64GB~1TB 0~70°C/-40~85°C
SATA DOM	MLC 8G~128GB, 0~70°C/-40~85°C
Wifi	Wifi M.2 2230 A-E key module
Modem	LTE miniPCle card
GPS	GPS miniPCle card
CANBUS	CANBUS miniPCle card
SIM-6A kit	3 x Moden miniPCle w/ 6*SIM cards, Cannot use with BAT-3620
Battery backup kit	BAT-3620 kit, 1150mAH 3S1P Battery kit (-30~60°C)
Power adapter	Power Adapter 12V/5A 60W Jack