


# APL-35-N3350

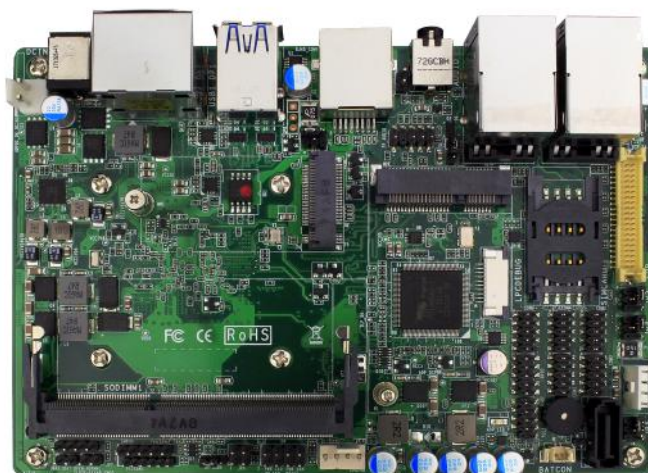

## Specifications

CPU	Intel® Apollo Lake N3350 2.40GHz (Burst) 1.10GHz Dual Core		
RAM	DDR3L 1866MHz memory support up to 8GB in SO-DIMM slot x1		
BIOS	AMI BIOS		
Expansion	MiniPCIe (full-size) x1		
Display	Intel® HD Graphics with MultiDisplay support eDP: resolution support up to 4096 x 2160 at 60Hz DisplayPort: resolution support up to 4096 x 2160 at 60Hz		
Audio	Realtek ALC662VD		
LAN	Intel i211AT GigaLAN x2		
Disk Support	M.2 SATA x1	SATA device x1	Micro SD card slot x1
I/O Interface	USB (ver. 3.0) x4 PS/2 x1	USB (ver. 2.0) x2 GPIO x1	COM x6 SIM card holder x1
Connectors	4-pin wafer for SATA power output x1 9-pin header for COM x5 DisplayPort connector x2 Phone Jack fo Line-out/MIC-in x1 RJ45 connector for LAN x2	6-pin header for PS/2 Keyboard & Mouse x1 10-pin header for GPIO x1 MiniPCIe slot x1 Power Jack for 12VDC input x1 SIM card holder x1	7-pin SATA connector for SATA x1 40-pin wafer for eDP x1 M.2 slot (M key 2242) for M.2 SATA x1 RJ45 connector for COM x1 USB connector for USB3.0 x4
Power Requirement	12VDC standard input from power jack or internal 2-pin power connector support for ATX/AT mode		
Operating Temperature	0°C to 60°C		
Dimension	148 x 102 mm		
O/S Support	Windows 10	Linux	

## PRELIMINARY VERSION

