

# Full IP65 LCD

## USB Type-C Display


7"

### Specifications



Model Name	W07L100-GST1-C
Panel Size	7"
Active Display Area (mm)	153.6 (H) x 90 (V)
Resolution	1024 x 600
Brightness (cd/m <sup>2</sup> )	320 (Typical)
Contrast Ratio	500:1 (Typical)
Viewing Angle (CR>=10 L/R/U/D)	-75~75(H) ; -75~70(V)
Display Colors	16.7M (8 bits/color)
Standard Input Signal	1 x IP67 USB Type-C connector
Touch Screen	Projected Capacitive Touch (USB) Protection Glass (Optional)
Speakers (Optional)*	1 x Speaker
OSD	5 Keys: -, +, Power, Esc, Enter
Power Source	USB Type-C Alt mode Power source needs to support 5V/3A
Power Consumption	6W typical, Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60 °C
Accessories	1 x USB Type-C cable
IP Rating	Full IP65
Certifications	CE, FCC

\*Note: If your order does not include the Audio/Speakers option, the digital input will not have voice.

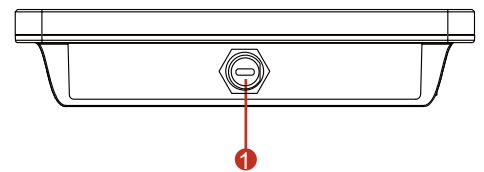

1. USB Type-C Connector
2. OSD Button

### Mechanical Drawing

