


EMXX-0102 mPCIe to M.2 B key Module


Features

- Support M.2 2230/2242 B key form factor
- Compliant with PCI Express Base Specification
- Compliant with Universal Serial Bus 2.0 Specification
- Compliant with SATA III Specification
- Optional NANO SIM slot on the back side
- Industrial temperature -40 °C to 85 °C
- 30μ" golden finger, 3-year warranty
- Industrial design, manufactured in innodisk Taiwan

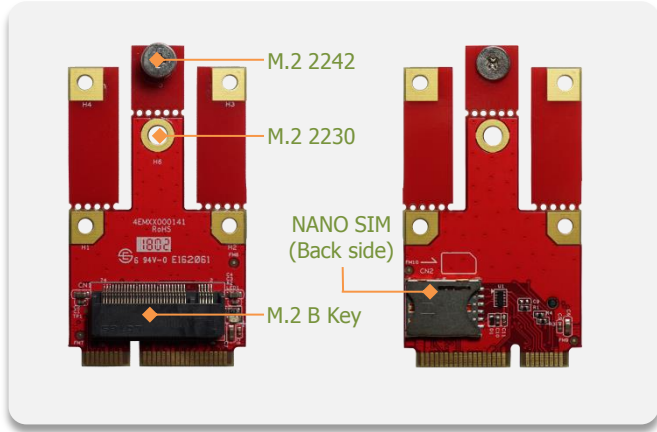


Mechanical Drawing

EMXX-0101-W1

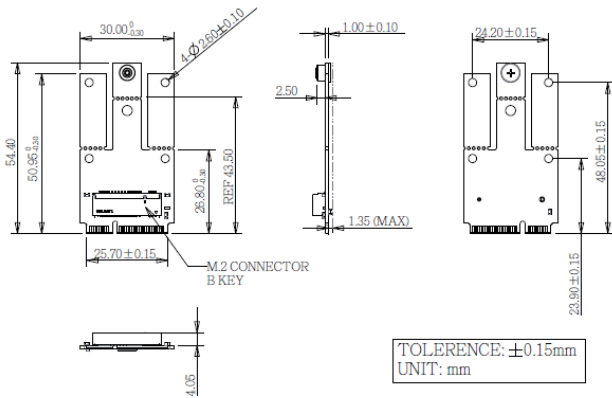

EMXX-0101-W2

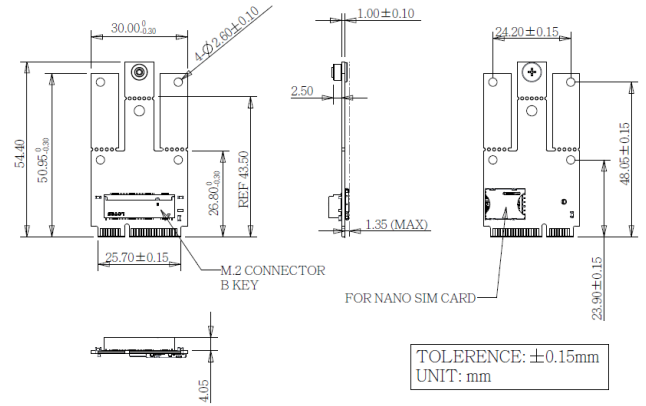

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan

Tel: +886-2-7703-3000
Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com
+1-510-770-9421

Europe

eusales@innodisk.com
+31-040-3045-400

Japan

jpsales@innodisk.com
+81-3-6667-0161

China

sales_cn@innodisk.com
+86-755-21673689

Specifications

Form-Factor	mPCIe
Input I/F	PCI Express, USB 2.0, SATA III
Output I/F	PCI Express, USB 2.0, SATA III
Output Connector	M.2 B Key
Dimension (WxLxH)	30 x 54.4 x 6.4 mm
Temperature	Operation: W/T: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

www.innodisk.com

© 2018 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

April 25, 2018

Order information

EMXX-0102-W1
EMXX-0102-W2 (SIM slot included)
mPCIe to M.2 B key Module