


PM-1004/1028-4/1028-8

4-port non-isolated RS-232/422/485 serial communication PC/104 module

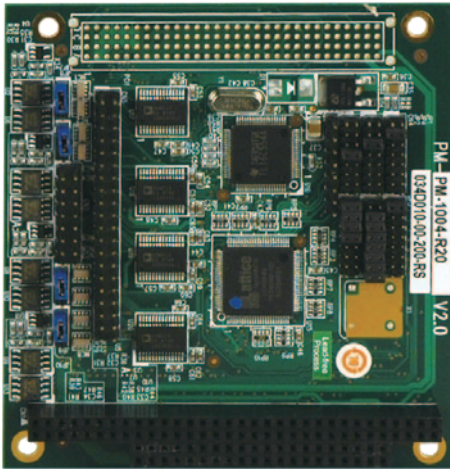

PM-1004

4-port/8-port non-isolated RS-232 serial communication PC/104 modules




PM-1028



P/N: 32205-002500-100-RS

Shipped with 4-port RS-422/485 connection cable



P/N: 32205-001201-100-RS

Shipped with 4-port RS-232 connection cable

Features

1. PC/104 form factor
2. 16C554 UART controller
3. Four jumper selectable RS-232 or RS-422/485 serial communication ports
4. Supports shared IRQ or independent IRQ mode
5. Jumper selectable interrupt level
6. Max. baud rate: 921.6kb/s
7. Windows® NT, Windows® 2000, Windows® XP, Windows® CE and Linux driver support

Specifications

	PM-1004	PM-1028-4	PM-1028-8
Bus Interface	PC/104		
Number of Ports	4-port	4-port	8-port
Interrupt Level	3, 4, 5, 7, 9, 10, 11, 12		
Chipset	TI 16C554A		
Baud Rate	921.6 Kbps (max.) at 14.745MHz clock input		
Serial Port	16C550-compatible UARTs		
Connectors (40-pin; 2.54 box header)	4-port RS-232/RS-422/RS-485 x 1	4-port RS-232 x 1	4-port RS-232 x 2
Power Consumption	+5V@0.6A (max.)		
Operating Temperature	0°C ~ 60°C		
Dimensions	96 mm x 90 mm		
Driver Support	Windows®NT, Windows®2000, Windows®XP, Windows®CE and Linux		

Packing List

- 1 x 4-port non-isolated RS-232/422/485 serial communication PC/104 module
- 1 x 4-port RS-422/485 connection cable (P/N: 32205-002500-100-RS)
- 1 x Utility CD
- 1 x RS-232 cable (P/N: 32205-001201-100-RS)
- 1 x Mini jumper pack

Ordering Information

Part No.	Description
PM-1004-R20	4-port non-isolated RS-232/422/485 serial communication PC/104 module
PM-1028-4-R20	4-port non-isolated RS-232 serial communications PC/104 module
PM-1028-8-R20	8-port non-isolated RS-232 serial communications PC/104 module

www.ipc2u.ru

www.ipc2u.de

www.sovio.com

Date:01.06.2016