

## I-9053P

16-channel Isolated Digital Input Module

### Features

- 16-channel Digital Input
- Channel Status LED Indicators
- Compatible with 24 V Levels
- Long Distance Measurement
- Dry and Wet Contact, Selectable via Wire Connections
- 3750 Vrms Intra-module Isolation
- Wide Operating Temperature Range : -25 ~ +75°C



### Introduction

The I-9053P offers 16 channels for digital input, catering for both dry and wet contact, with an effective distance for dry contact of up to 500 meters. All channels feature photocouple isolation.

The I-9053P provides 16 LED indicators that can be used to monitor the DI channel status. 4 kV ESD protection and 3750 Vrms intra-module isolation are also provided to enhance noise immunity capabilities in industrial environments.


### System Specifications

Model	I-9053P
<b>LED Display</b>	
System LED Indicators	1 LED as Power Indicator
I/O LED Indicator	16 LEDs as Digital Input Indicators
<b>Isolation</b>	
Intra-module Isolation, Field to logic	3750 Vrms
<b>EMS Protection</b>	
ESD(IEC 61000-4-2)	±4 kV Contact for Each Terminal
	±8 kV Air for Random Point
<b>Power</b>	
Power Consumption	1 W Max.
<b>Mechanical</b>	
Dimensions (L × W × H)	144 mm × 31 mm × 134 mm
<b>Environment</b>	
Operating Temperature	-25 ~ +75°C
Storage Temperature	-40 ~ +85°C
Humidity	10 ~ 90% RH, Non-condensing


### I/O Specifications

Model	I-9053P	
<b>Digital Input</b>		
Channels	16	
Sink/Source (NPN/PNP)	Sink/Source	
Input Type	Dry, Wet	
Dry Contact	On Voltage Level	Close to GND
	Off Voltage Level	Open
Wet Contact	On Voltage Level	+19 VDC ~ +30 VDC
	Off Voltage Level	+11 VDC Max.
Input Impedance	3 KΩ, 1W	
Effective Distance for Dry Contact	500 m Max.	
<b>Low Pass Filter</b>		
Response time	OFF to ON	1 ms/5 ms/10 ms/20 ms/40 ms/70 ms (by Jumper select) or CPU parameter setting Default Setting is 10ms
	ON to OFF	1 ms/5 ms/10 ms/20 ms/40 ms/70 ms (by Jumper select) or CPU parameter setting Default Setting is 10ms

### Internal I/O Structure

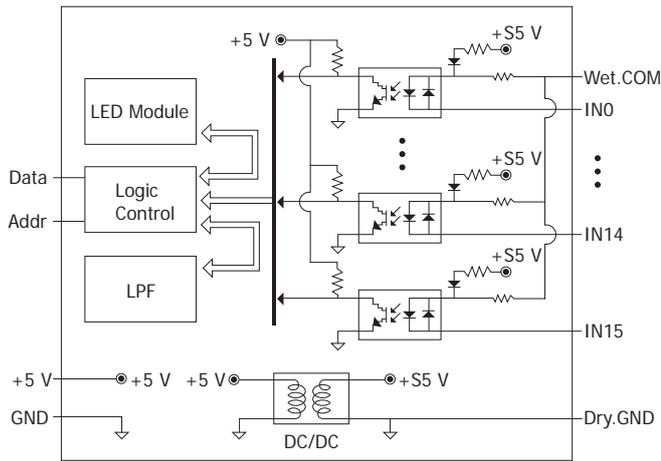


### Pin Assignments


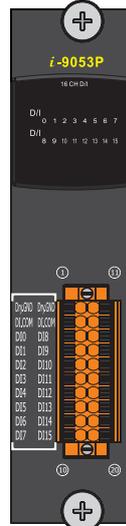


Pin Assignment	Terminal No.	Pin Assignment
Dry.GND	01	11 Dry.GND
DI.COM	02	12 DI.COM
DI0	03	13 DI8
DI1	04	14 DI9
DI2	05	15 DI10
DI3	06	16 DI11
DI4	07	17 DI12
DI5	08	18 DI13
DI6	09	19 DI14
DI7	10	20 DI15

### Dimensions (Units: mm)

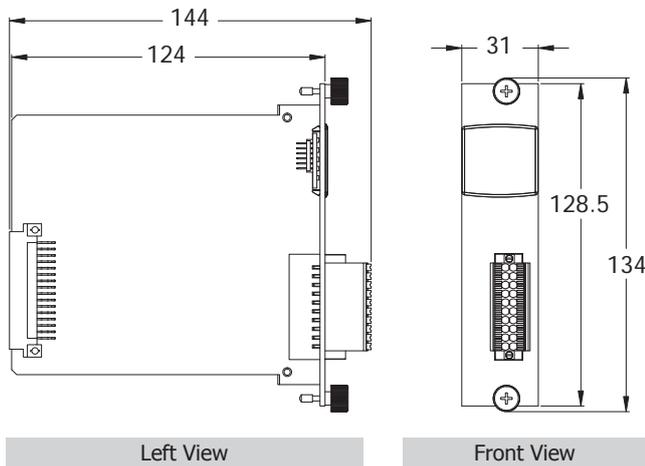

### Wire Connections

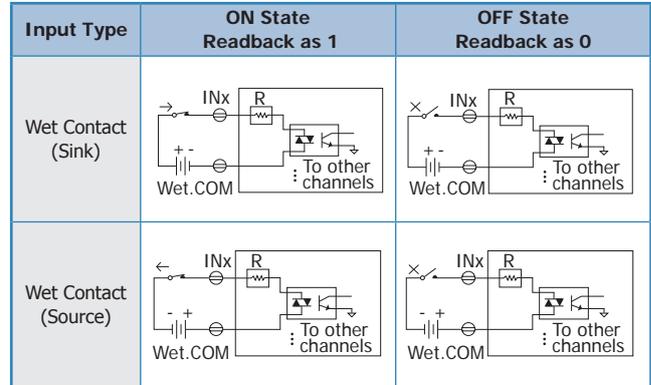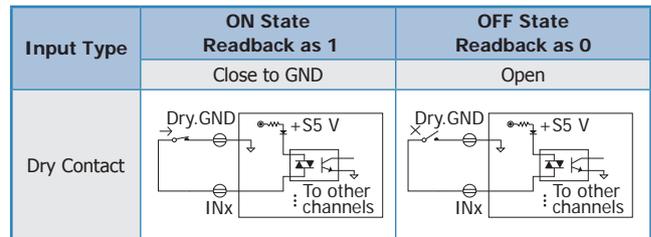

### Ordering Information

I-9053P CR	16-channel Isolated Digital Input Module (RoHS)
------------	---